

As an upgraded version of our 1900DW unit, the 1900DWDT offers dual temperature options in the same cabinet. Using separate controls and heating systems, this unit offers the ultimate in flexibility with different temperature set-points in the upper and lower compartments. Using patented Fluid Shelf® technology, food quality and safety are a sure thing.



SPECIFICATIONS	
EXTERIOR DIMENSIONS	30.50"W x 25.88"D x 75.00"H
INTERIOR DIMENSIONS	26.50"W x 22.50"D x 58.50"H
CUBIC CAPACITY	20.19ft ³
MAX OPERATING TEMP	230°F
NET WEIGHT	465lbs.
SHIPPING WEIGHT	536lbs.

ELECTRICAL SPECIFICATIONS	
VOLTS	208 / 240
AMPS	25 / 29
TOTAL WATTS	5250 / 7000
HERTZ	60
PHASE †	1
PLUG	NEMA L14-30

SHELVES	
STANDARD	10



CAPACITIES	STANDARD	MAXIMUM*
SHEET PAN		
18" x 26" x 1"	10	21
STEAM TABLE PAN		
12" x 20" x 2.5"	20	28
12" x 20" x 4"	20	20

*Maximum capacities are based on additional shelving. Capacities vary depending on shelf quantities, spacing, and pan depth.
 **Additional shelves may require dual plugs.

OPTIONS / ACCESSORIES	
Protective Bumper Base	Additional Heat Transfer Plates
Controller Shield	Solid Stainless Steel Doors
Solid Back Panel	Stainless Steel Drip Pan

† Available in 3Ø by request

Specifications subject to change without notice.

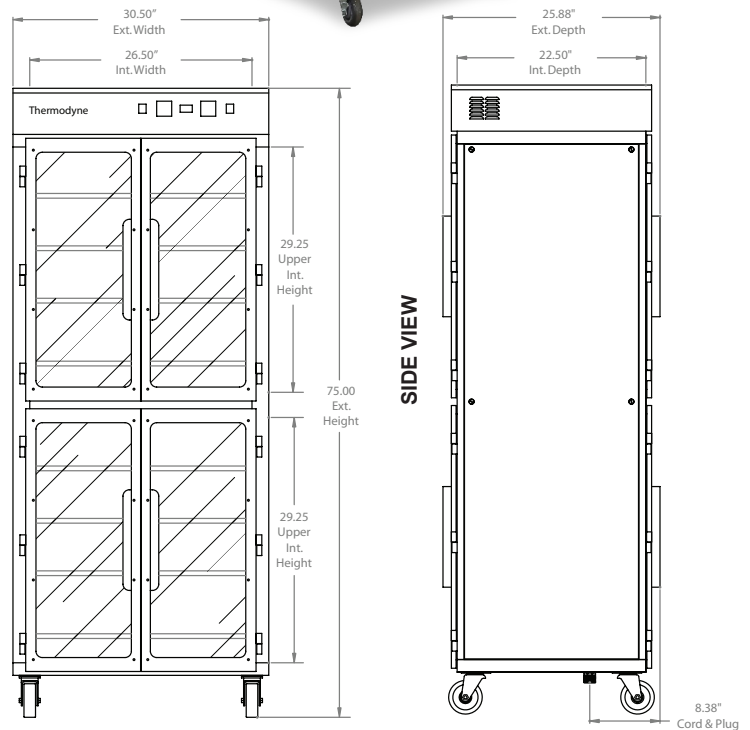

Patented REV. 4/16