

Thermodyne's 1000DW slow cook and hold oven offers additional space for side by side pan placement along with double doors for tight areas that require a narrow door swing. The 1000DW offers all of the benefits of Fluid Shelf® technology in a compact single stack unit and can be utilized under a counter.

SPECIFICATIONS	
EXTERIOR DIMENSIONS	30.50"W x 27.50"D x 33.56"H
INTERIOR DIMENSIONS	26.50"W x 22.50"D x 20.00"H
CUBIC CAPACITY	6.90ft <sup>3</sup>
MAX OPERATING TEMP	230°F

NET WEIGHT	165lbs.
SHIPPING WEIGHT	240lbs.

ELECTRICAL SPECIFICATIONS	
VOLTS	208 / 230
AMPS	26 / 29
TOTAL WATTS	5340 / 6550
HERTZ	60
PHASE	1
PLUG	NEMA L14-30


SHELVES	
STANDARD	4

CAPACITIES	STANDARD	MAXIMUM*
STEAM TABLE PAN		
12" x 20" x 2.5"	8	10
12" x 20" x 4"	6	6

\*Maximum capacities are based on additional shelving. Capacities vary depending on shelf quantities, spacing, and pan depth.


OPTIONS / ACCESSORIES	
Heavy Duty Casters	3 Phase
Solid Stainless Steel Doors	120V Adapter
Solid Back Panel	

Specifications subject to change without notice.



Patented

REV. 07/18

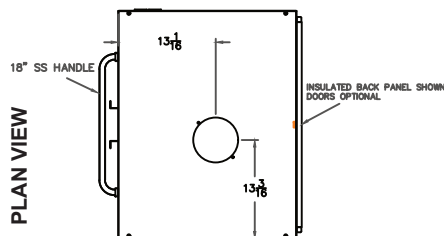

PLAN VIEW



\*Unit pictured without optional stainless push bar.

