

Designed as a dimensional alternative to the 1900G, Thermodyne's 1900DW offers additional space for side by side pan placement along with double doors for tight areas that require a narrow door swing. Using patented Fluid Shelf® technology, food quality and safety are a sure thing.



SPECIFICATIONS	
EXTERIOR DIMENSIONS	30.50"W x 25.88"D x 75.00"H
INTERIOR DIMENSIONS	26.50"W x 22.50"D x 58.50"H
CUBIC CAPACITY	20.19ft³
MAX OPERATING TEMP	230°F
NET WEIGHT	449lbs.
SHIPPING WEIGHT	520lbs.

ELECTRICAL SPECIFICATIONS	
VOLTS	208 / 240
AMPS	25 / 29
TOTAL WATTS	5250 / 7000
HERTZ	60
PHASE †	1
PLUG	NEMA L14-30

SHELVES	
STANDARD	10

CAPACITIES	STANDARD	MAXIMUM*
SHEET PAN		
18" x 26" x 1"	10	21
STEAM TABLE PAN		
12" x 20" x 2.5"	20	28
12" x 20" x 4"	20	20


*Maximum capacities are based on additional shelving. Capacities vary depending on shelf quantities, spacing, and pan depth.

OPTIONS / ACCESSORIES	
Protective Bumper Base	Additional Heat Transfer Plates
Controller Shield	Solid Stainless Steel Doors
Solid Back Panel	Stainless Steel Drip Pan


† Available in 3Ø by request

Specifications subject to change without notice.



FRONT VIEW

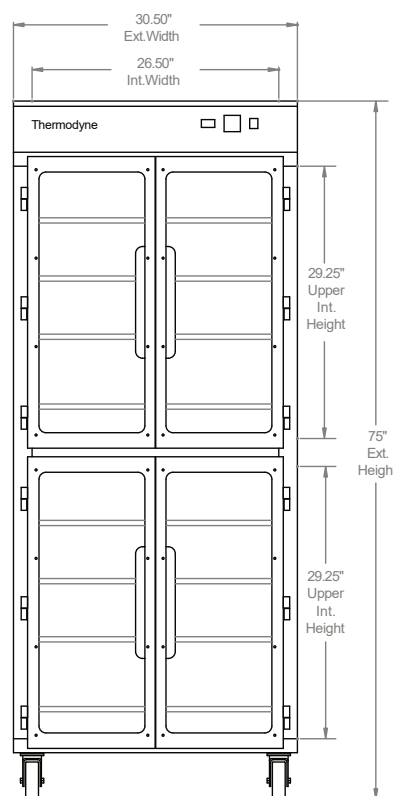

SIDE VIEW

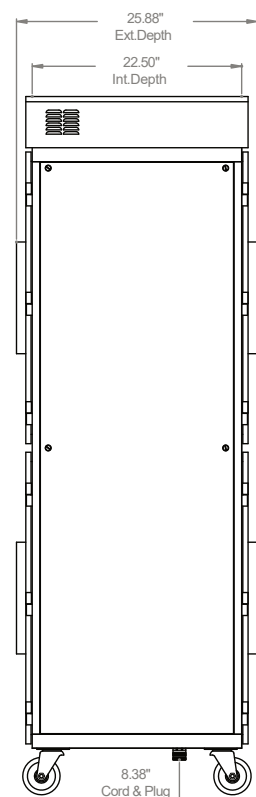

PLAN VIEW



Patented



REV. 12/20